


Medida D Size D	Referencia Part Num.	Denom.	d	B	H	C	M	Carga Trabajo Workload W.L.L. (Kg.)
5	09523413	GRC105	5	10	19	10	M5	80
6	09523421	GRC106	6	12	24	12	M6	100
8	09523430	GRC108	8	16	32	16	M8	200
10	09523448	GRC110	10	20	40	19	M10	320
11	09525670	GRC111	11	22	44	21	M11	400
12	09523456	GRC112	12	25	48	24	M12	520
14	09523464	GRC114	14	28	56	27	M14	650
16	09523472	GRC116	16	32	64	31	M16	800
18	09523480	GRC118	18	36	71	35	M18	1.000
19	09523499	GRC119	19	38	76	38	M20	1.100
22	09523501	GRC122	22	44	85	43	M22	1.500
25	09523510	GRC125	25	50	95	49	M24	2.100
28	09523528	GRC128	28	56	106	54	M27	3.000
32	09523536	GRC132	32	64	120	62	M33	3.500
36	09525689	GRC136	36	70	130	70	M36	4.000
38	09523552	GRC138	38	76	145	74	M39	5.000
42	09523560	GRC142	42	76	145	81	M42	8.000
45	09523579	GRC145	45	80	155	87	M45	8.400
50	09523587	GRC150	50	90	175	96	M52	9.600
56	09523595	GRC156	56	100	195	112	M56	16.000
63	09523608	GRC163	63	115	220	123	M64	20.000

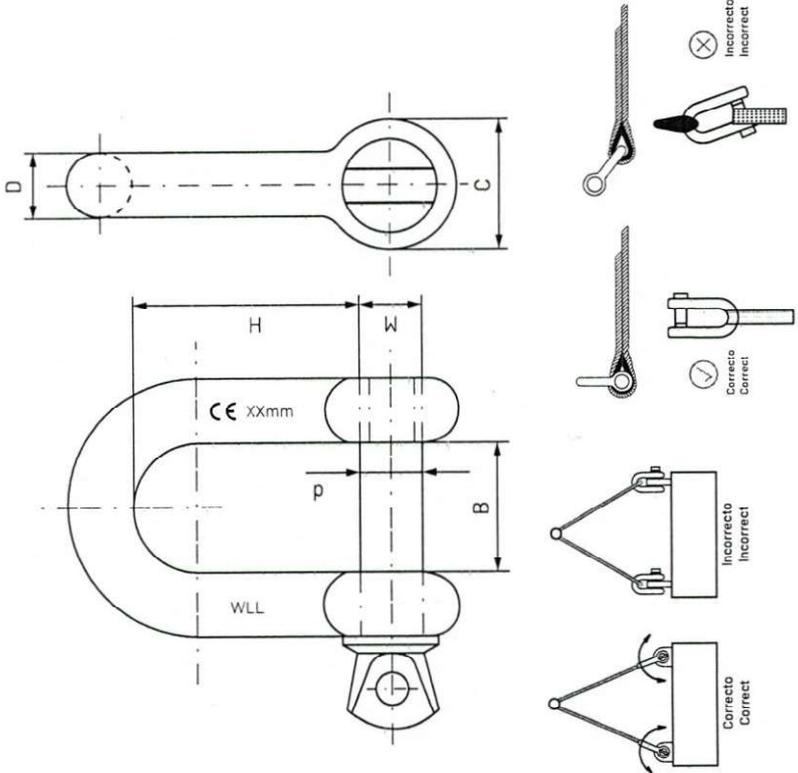

**INFORMACIÓN TÉCNICA / TECHNICAL INFORMATION**

- Material:** Acero C15  
**Material:** C15 Steel
- Acabado:** Cincado  
**Finish:** Zinc-plated
- Instalación:** Revisar antes de su uso que todos los marcajes sean legibles. Siempre se debe respetar la carga de trabajo W.L.L. indicada para cada medida. Solo debe emplearse para eslingas de un ramal y manteniendo la línea directa (Carga perpendicular al bulón y centrada en el grillete).  
**Installation:** Check before use that all markings are legible. Always respect the W.L.L. working load indicated for each size. It should only be used for single strand slings and maintaining the direct line (load perpendicular to the bolt and centered on the shackle). Ensure that the bolt is properly threaded into the shackle eye.

M10	NIVEL INICIAL 22/04/2022 NUEVO FORMATO	
NIVEL	DESCRIPCIÓN	
	CUSTOMER	FAMILIA 09523AAA
HOJA A-4	NOMBRE GRILLETE RECTO GALVANIZADO CON PUNZÓN D-SHACKLES	
ESCALA	REF. INTERNA 09523AAA	NOTAS
TOL. GENERAL		
	DIBUJO MVL	FIRMA
	APROBADO JMG	
	FECHA 22/04/22	

